

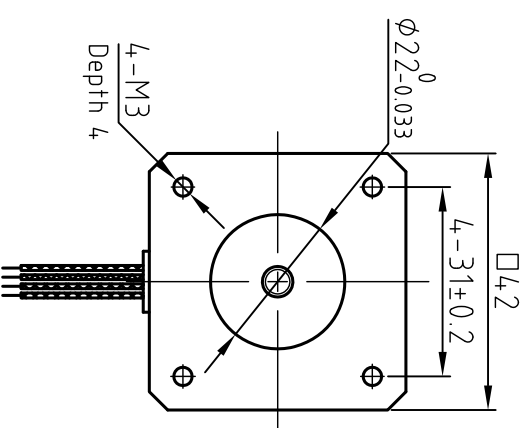


Dimension: (Unit: mm)

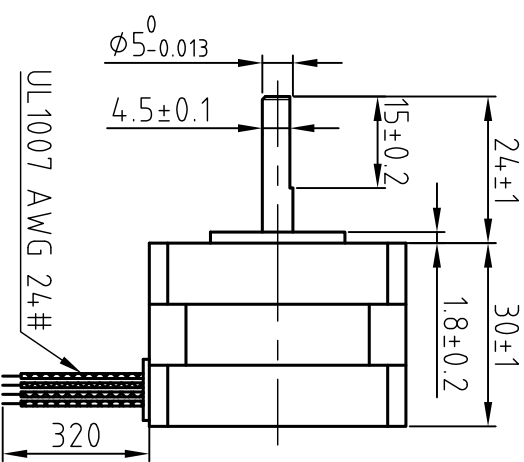

Motor Connetions:

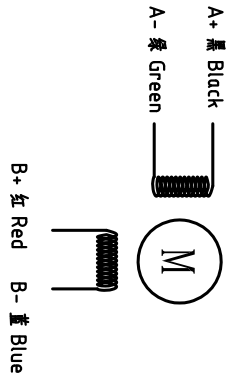

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.06mm(Load 900g)

Specification:

Current/phase	1.5 A
Voltage	3 V
DC Resistance/phase ±10%	1.22 Ω
Inductance/phase ±20%	1.54 mH
Holding torque	0.2 N·M
Inertia	0.023 kg·cm ²
Weight	0.2 kg

设计 Designed	日期 Date	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked		第一角画法 First angle projection	混合式步进电机
批准 Approved		重量/Weight 比例/Scale 阶段标识/Stage Mark	4.2HS02A
料号 Part No.		共 1 套 第 1 套 Sheet 1 of 1	图号 DWG. NO.