


573S09 3-PHASE HYBRID STEPPING MOTOR

specifications:


MODEL	PHASE	STEP ANGLE	RATED VOLTAGE	LINE CURRENT	RESISTANCE /PHASE	INDUCTANCE /PHASE	HOLDING TORQUE	DETENT TORQUE	ROTOR INERTIA	WEIGHT
		DEG/STEP	V	A	ohms	mH	N.m	N.cm	g.cm ²	Kg
	3	1.2	2.7	3.5	0.77	1.8	0.9	4Max	300	0.75

Wiring Diagram:

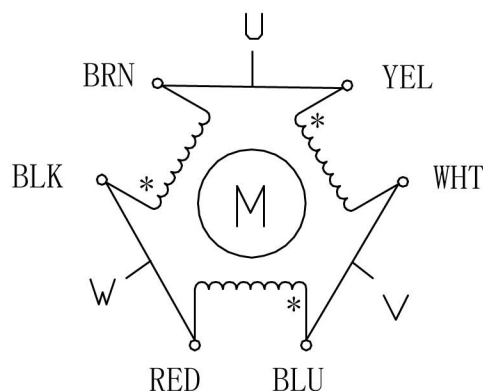

UL1332 AWG22# LENGTH:400mm

Dimension:

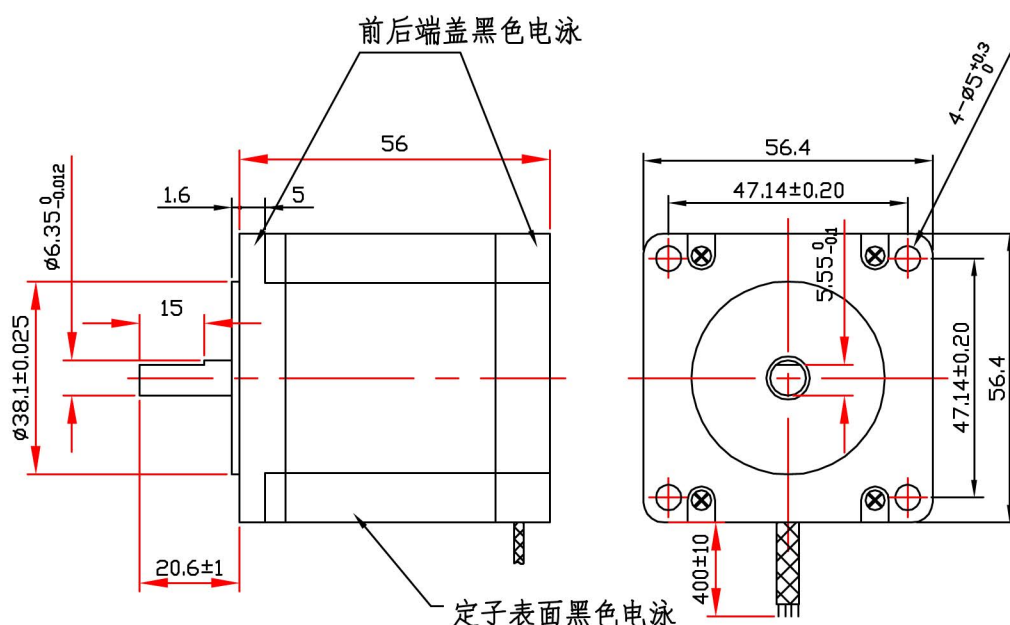

B	080506gy	新开模定子冲片								
A	080131L1	表面处理由黑塑到电泳	LN	JOHN	2008.01.31	DRAWN	DATE	TITLE		
REV	ECN NO.	DESCRIPTION	DRN	APP'D	DATE			SPECIFICATIONS		
UNLESS OTHERWISE SPECIFIED TOLERANCES:			MATERIAL			CHECK		USED ON		
DECIMALS:			ANGULAR:			APPD		573S09		
.x ±0.5			±0°30'					DWG NO.		
.xx ±0.25								REV		
.xxx ±0.1								B		
DO NOT SCALE DRAWING			THIRD ANGLE PROJECTION			SCALE		深圳市雷赛智能控制股份有限公司		
						SHEET	OF			