

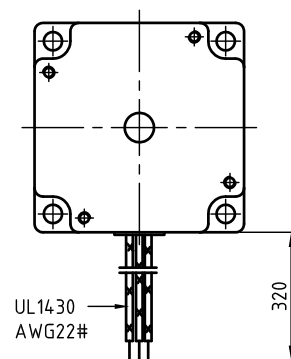
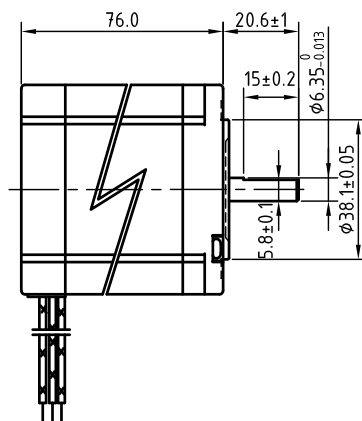


A

 DIMENSIONS unit=mm

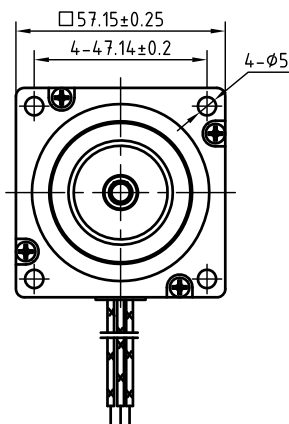

 MOTOR CONNECTIONS



B

C

D

E

F

 COMMON RATINGS

Step angle	1.8°
Position accuracy	1.8°±0.09°
Number of phase	2
Temp rise(Max)	80°C
Dielectric strength	500VDC
Insulation resistance	100M0hm(500VDC)
Radial play	Max 0.025mm(Load 450g)
Axial play	Max 0.075mm(Load 920g)
Insulation class	B

 SPECIFICATION

57HS13	Unipolar	Bipolar(Series)	Bipolar(Parallel)
Current/phase: A	2.8	2.0	4.0
DC Resistance: Ω±10%	1.0	2.0	0.5
Inductance/phase:mH±20%	2.1	8.4	2.1
Holding torque: N.m	1.3	1.8	1.8
Inertia: g.cm ²	480	480	480
Weight: Kg	1.0	1.0	1.0

E			UNIT:mm 第一角画法 FIRST ANGLE VIEW	批准 Approve			57HS13		
D				标准化 Standard					
C				工艺 Technology					
B				审核 Check					
A	第一版本 The first version	2012.07.24		设计 Design			深圳市雷赛智能控制股份有限公司		
REV:	版本记录 REVISION RECORD	DATE		NAMES	SIGNATURE	DATE	MODEL:	SCALE 1:1	SHEET 1 OF 1