

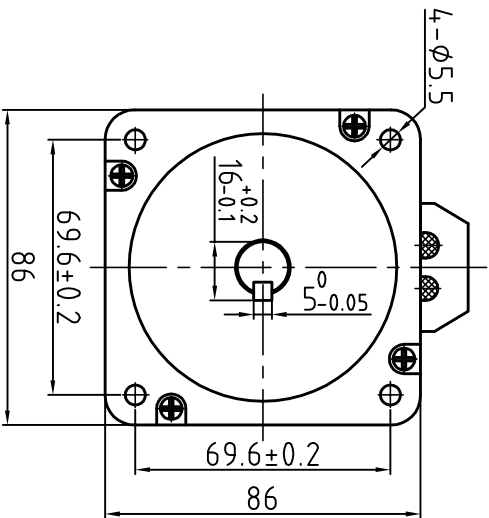


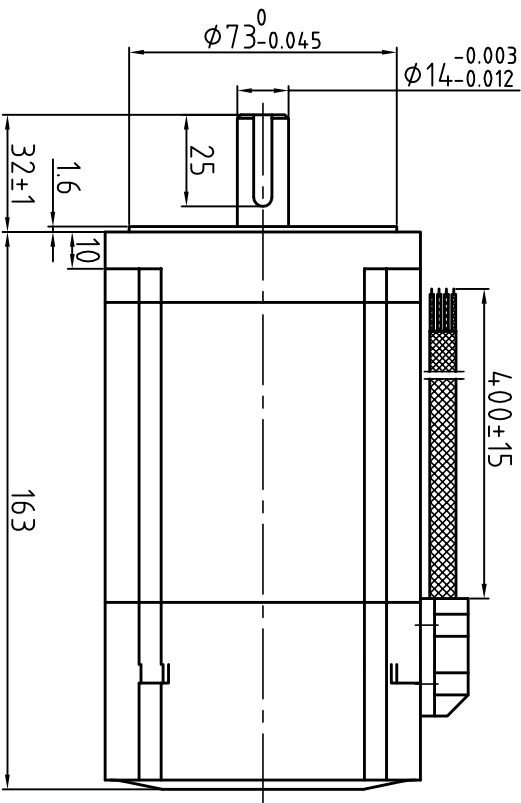


Motor Connctions



B+ 黄 Yellow B- 蓝 Blue

Brake Connctions



Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	1000VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 450g)
Axial play	Max:0.08mm(Load 900g)

Specification

Current/phase	6.0 A
Voltage	3.2 V
DC Resistance/phase	±10% 0.69 Ω
Inductance/phase	±20% 5.3 mH
Holding torque	12 N·M
Inertia	2.8 kg·cm ²
Weight	5.8 kg

Brake Specification

Voltage	24Vdc
Friction torque	4N·M

设计 Designed	王瑞松	日期 Date	19.5.25	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄雄波	19.5.25	第一角画法 First angle projection	比例 Scale	混合式步进电机
批准 Approved	黄雄波	19.5.25	重量 Weight	比例 Scale	86CM120-BZ
图号 Part No.	共 1 页 第 1 页	Sheet 1 of 1	表头编号为: LS-MT-01-07A		