
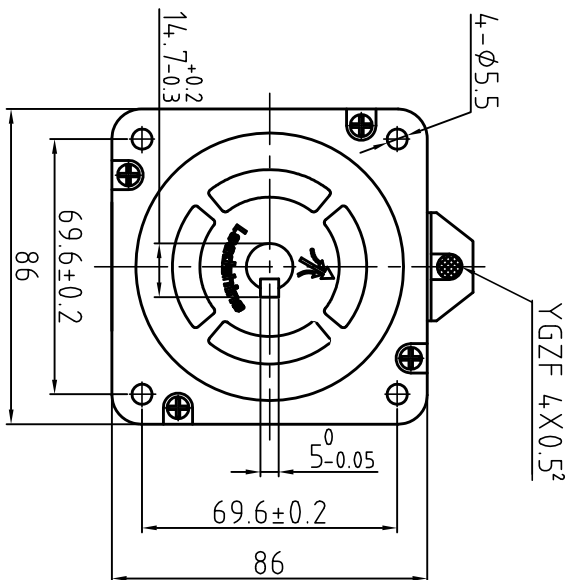
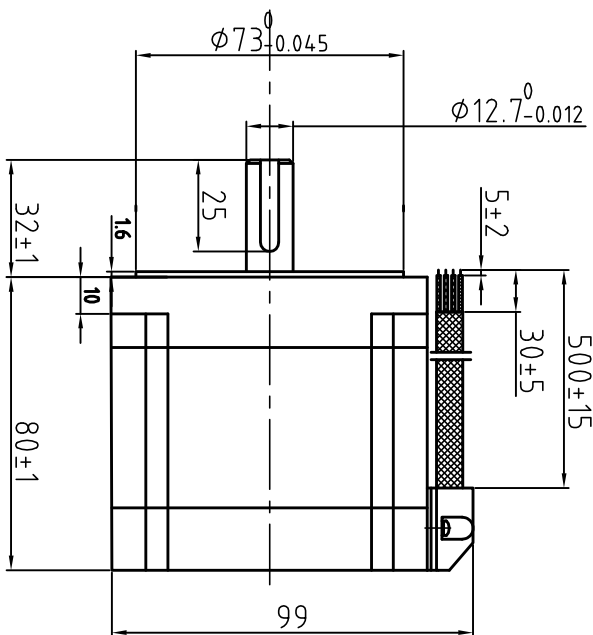


Dimension: (Unit: mm)

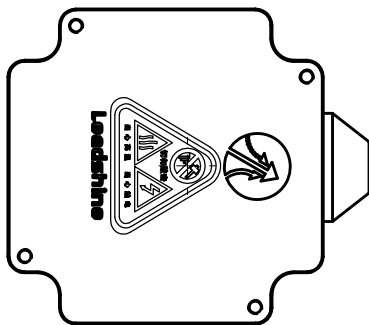


Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	6.0 A
Voltage	3.6V
DC Resistance/phase	0.43 Ω
Inductance/phase	2.95 mH
Holding torque	4.6N•M
Inertia	1.4 kg•cm²
Weight	2.4 kg

Motor Connections

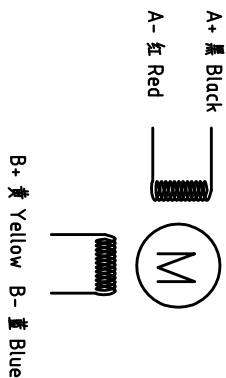

设计 王洪松	日期 17.05.19	材料 材料	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 刘佩峰	17.05.19	第一角画法 First Angle projection	混合式步进马达
批准 王洪松	17.05.19	重量 Weight	86CM4.5
图号 Part No.	共 1 页 第 1 页 Sheet 1 of 1	图号 DWG. NO.	

版本 Rev	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	17.5.19		带 LOGO	王洪松